



FEDERAL EMERGENCY MANAGEMENT AGENCY  
NATIONAL FLOOD INSURANCE PROGRAM

OMB 3067-0077

# ELEVATION CERTIFICATE

This form is to be used for: 1) New/Emergency Program construction in Special Flood Hazard Areas; 2) Pre-FIRM construction after September 30, 1982; 3) Post-FIRM construction; and, 4) Other buildings rated as Post-FIRM rules.

Niel Hall P.O. BOX 834 Kalama, Wn., 98625  
BUILDING OWNER'S ADDRESS

2066 Evergreen St. Woodland, Wn, 98674  
PROPERTY LOCATION (Lot and Block numbers and address if available)

I certify that the information on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. code, Section 1001.

**SECTION I ELIGIBILITY CERTIFICATION** (Completed by Local Community Permit Official or a Registered Professional Engineer, Architect, or Surveyor)

COMMUNITY NO.	PANEL NO.	SUFFIX	DATE OF FIRM	FIRM ZONE	DATE OF CONSTR.	BASE FLOOD ELEV. (in AO Zone, use depth)	BUILDING IS
530035	001	C	9/4/85	A-15	1/ 1991	35.00	<input checked="" type="checkbox"/> New/Emergency <input type="checkbox"/> Pre-FIRM Reg. <input type="checkbox"/> Post-FIRM Reg.

YES  NO  It is intended that the building described above *will* be constructed in compliance with the community's flood plain ordinance. The certifier may rely on community records. The lowest floor (including basement) will be at an elevation of        ft, NGVD. Failure to construct the building at this elevation may place the building in violation of the community's flood plain management ordinance.

YES  NO  The building described above has been constructed in compliance with the community's flood plain management ordinance based on elevation data and visual inspection or other reasonable means.

If NO is checked, attach copy of variance issued by the community.

YES  NO  The mobile home located at the address described above has been tied down (anchored) in compliance with the community's flood plain management ordinance, or in compliance with the NFIP Specifications.

MOBILE HOME MAKE	MODEL	YR. OF MANUFACTURE	SERIAL NO.	DIMENSIONS
				X

(Community Permit Official or Registered Professional Engineer, Architect, or Surveyor)

NAME Russell B. Bass ADDRESS PO BOX 128

TITLE P.L.S.# 9130 CITY Kelso STATE Wn. ZIP 098626

SIGNATURE *Russell B. Bass* DATE 4/8/91 PHONE 577 - 1548

**SECTION II ELEVATION CERTIFICATION** (Certified by a Local Community Permit Official or a Registered Professional Engineer, Architect, or Surveyor.)

FIRM ZONE A1-A30: I certify that the building at the property location described above has the *lowest floor* (including basement) at an elevation of 36.52 feet, NGVD (mean sea level) and the average grade at the building site is at an elevation of 33.40 feet, NGVD.

FIRM ZONES V, V1-V30: I certify that the building at the property location described above has the *bottom of the lowest floor beam* at an elevation of        feet, NGVD (mean sea level), and the average grade at the building site is at an elevation of        feet, NGVD.

FIRM ZONES A, A99, AO, AH, and EMERGENCY PROGRAM: I certify that the building at the property location described above has the lowest floor elevation of        feet, NGVD. The elevation of the highest adjacent grade next to the building is        feet, NGVD.

**SECTION III FLOODPROOFING CERTIFICATION** (Certification by a Registered Professional Engineer or Architect)

I certify to the best of my knowledge, information, and belief, that the building is designed so that the building is watertight, with walls substantially impermeable to the passage of water and structural components having the capability of resisting hydrostatic and hydrodynamic loads and effects of buoyancy that would be caused by the flood depths, pressures velocities, impact and uplift forces associated with the base flood.

YES  NO  In the event of flooding, will this degree of floodproofing be achieved with human intervention? (Human intervention means that water will enter the building when floods up to the base flood level occur unless measures are taken prior to the flood to prevent entry of water (e.g., bolting metal shields over doors and windows).

YES  NO  Will the building be occupied as a residence?

If the answer to both questions is YES, the floodproofing cannot be credited for rating purposes and the actual lowest floor must be completed and certified instead. Complete both the elevation and floodproofing certificates.

FIRM ZONES A, A1-A30, V1-V30, AO and AH: Certified Floodproofed Elevation is 35.00 feet, (NGVD).

THIS CERTIFICATION IS FOR  SECTION I  BOTH SECTIONS II AND III (Check One)

CERTIFIER'S NAME COMPANY NAME LICENSE NO. (or Affix Seal)

Russell B. Bass Cascade Timber Service I.S # 9130

TITLE ADDRESS ZIP

PARTNER/Surveyor PO BOX 128 Wn. 98626

SIGNATURE DATE CITY STATE PHONE

*Russell B. Bass* April 8, 1991 Wn. 577 - 1548

The insurance agent should attach the original copy of the completed form to the flood insurance policy application, the second copy should be supplied to the policyholder and the third copy retained by the agent

**New/Emergency Program Construction:**

For the purposes of determining insurance rates, buildings for which the start of construction or substantial improvement commenced after September 30, 1982, are New/Emergency buildings.

**Pre-FIRM Construction:**

For the purposes of determining insurance rates, buildings for which the start of construction or substantial improvement was on or before December 31, 1974 or the effective date of the Initial Flood Insurance Rate Map (date printed on community FIRM), whichever is later. *Special Note:* If an approved building permit is dated prior to December 31, 1974, construction must have commenced not later than 180 days after the date of the approved building permit. "Existing Construction" and "Pre-FIRM Construction" have identical meanings for the purposes of the National Flood Insurance Program.

**Post-FIRM Construction:**

For insurance rating purposes buildings for which the start of construction or substantial improvement commenced after December 31, 1974 or the effective date of the initial Flood Insurance Rate Map (date printed on community FIRM), which ever is later. "New Construction" and "Post-FIRM Construction" have identical meanings for the purposes of the National Flood Insurance Program.

**Substantial Improvement:**

Any repair, reconstruction, or improvement of a building, the cost of which equals or exceeds 50 percent of the market value of the building either (a) before the improvement or repair is started, or (b) if the building has been damaged, and is being restored the market value before the damage occurred. For Flood Insurance Program purposes substantial improvement is started when the first alteration of any wall, ceiling, floor, or other structural part of the building commences, whether or not that alteration affects the external dimensions of the structure. However, the term does not include either any project for health, sanitary, or safety code specifications which are solely necessary to assure safe living conditions; or any alteration of a building listed on the National Register of Historic Places or a State Inventory of Historic Places.

**Lowest Floor** — The lowest floor is the lowest floor (including basement) of the enclosed area. The following modifications of the lowest floor definition are permitted in order to meet community permit practices:

(1) In Zones A, AO, AH, A1-A30, B, C, D, and Emergency Program areas which are not oceanside building sites, the following exceptions apply:

(a) The floor of an unfinished enclosed area at ground level or above, which is a crawl space, or space within the foundation walls, usable as areas for building maintenance, access, parking vehicles, or storing of articles and maintenance equipment (not attached to the building) used in connection with the premises is not considered the building's lowest floor if the walls of the unfinished enclosed areas are constructed with openings (such as with parallel shear walls, open lattice walls, discontinuous foundation walls, and combinations thereof) to facilitate the unimpeded movement of flood waters or the walls are breakaway walls.

(b) The floor of an attached unfinished garage used for parking vehicles and storing articles and maintenance equipment used in connection with the premises and not attached to the building is not considered the building's lowest floor if the walls of the unfinished enclosed areas are constructed with openings (such as with parallel shear walls, open lattice walls, discontinuous foundation walls, or combinations thereof) to facilitate the unimpeded movement of flood waters or the walls are breakaway walls.

The unimpeded movement of flood waters is imperative to equalize the hydrostatic pressure inside and outside of the walls of the building and/or garage.

(2) In Zones V and V1-V30; and Emergency Program areas which are oceanside building lots, the following exceptions apply:


(a) For flood plain management purposes, the floor of an unfinished enclosed area is not considered the building's lowest floor if the area's walls are constructed as breakaway walls. However, for insurance rating purposes:

(i) The floor of an unfinished enclosed area less than 300 square feet is not considered the building's lowest floor if the walls are breakaway walls.

(ii) The floor of an unfinished enclosed area equal to or greater than 300 square feet is considered the building's lowest floor even if the walls are breakaway walls.

(b) The floor of an unfinished enclosed area with walls made of insect screening or open wood constructed break-away lattice work (regardless of the size of the area enclosed) is not considered the building's lowest floor.

**Lowest Floor Elevation** — The lowest floor elevation is the elevation of the bottom of the floor beam of the lowest floor in Zones V, V1-V30. In all other zones, the lowest floor elevation is the elevation of the top of the lowest floor.

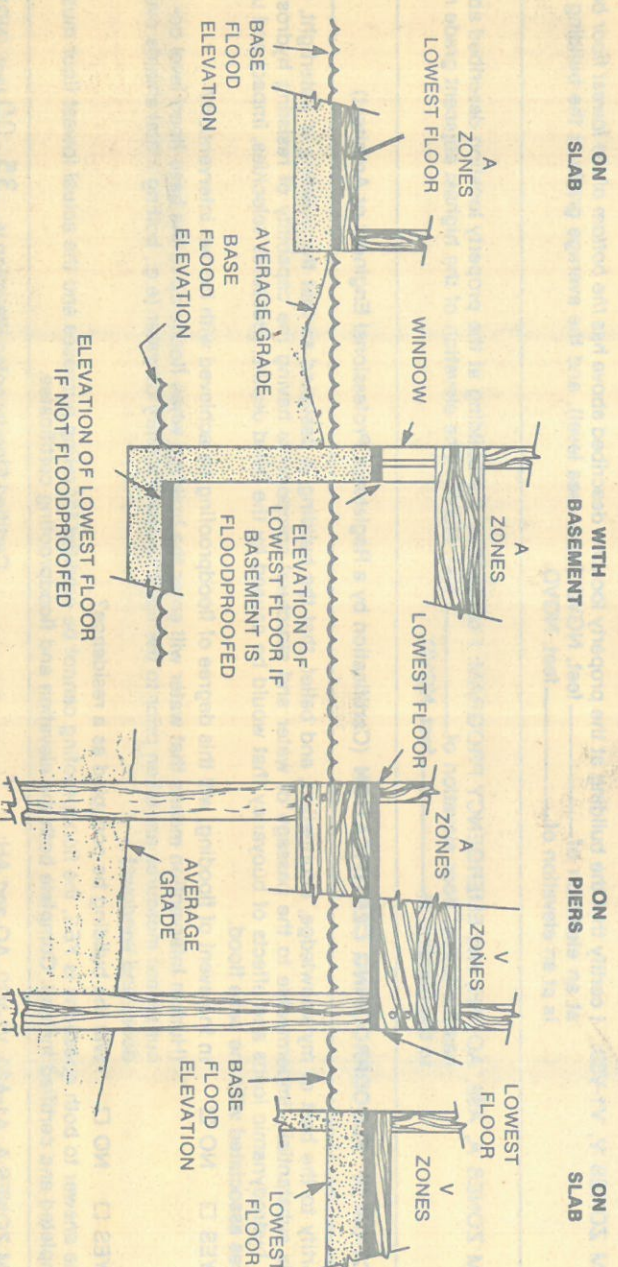

**NOTE:**

A Zones — A, AO, AH, A1-A30, A99, Emergency Program other than Oceanside Building Sites

V Zones — V, V1-V30, Emergency Program Oceanside Building Sites (beach areas subject to wave action during severe storms)

**Base Flood Elevation** — Flood plain management requirements including the Base Flood Elevation are shown on the FIRM for Zones AH, A1-A30, V1-V30. For FIRM Zone A, V, and Emergency Program Special Flood Hazard Areas the community permit official or the builder has estimated this elevation by the reasonable interpretation of available data. Enter that estimated elevation in the space provided in Section I of the Elevation Certification for Base Flood Elevation. If this community permit official or the builder has not selected an estimated Base Flood Elevation, enter N.A.