ELEVATION CERTIFICATE

O.M.B. NO. 3067-0077 Expires May 31, 1996

10

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
ALBERT KROFUTT	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
369 GUD CLUPS ROMO	
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
LOT 102	
CITY	ZIP CODE
in any occ (U	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMAT	TON
rovide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZO	
530035. 0001 C SEPT 4,1985 A15	(in AO Zones, use depth)
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD For Zones A or V, where no BFE is provided on the FIRM, and the community has established a Bit the community's BFE:	0°29 Other (describe on back FE for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	
a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the se of 1351 A feet NGVD (or other FIRM datum-see Section B, Item 7). b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural mem the selected diagram, is at an elevation of 1562 at the selected diagram, is at an elevation of 1663 at the reference level from the selected diagram is below (check one) the highest grade adjacent to the building. d). FIRM Zone A0. The floor used as the reference level from the selected diagram is 1664 and 1665 at the highest grade adjacent to the building. If no flood depth number is available, is the build level) elevated in accordance with the community's floodplain management ordinance? 1665 Yes Indicate the elevation datum system used in determining the above reference level elevations: 1665 Indicate the elevation datum system used in determining the elevations to the datum system used on the FIRM (see Section B, Item 7), then convert the elevations to the datum system used on the FIRM equation under Comments on Page 2.)	eber of the reference level from the Section B, Item 7). Light feet above or or or or or or or or or or
Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)	
The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference lecase this certificate will only be valid for the building during the course of construction. A post-const will be required once construction is complete.)	evel floor in place, in which druction Elevation Certificate
The elevation of the lowest grade immediately adjacent to the building is: 132.4 feet NG Section B, Item 7).	VD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevati floor" as defined by the ordinance is:	on of the building's "lowest
FMA Form 91 21 MAY 02	


SECTION E CERTIFICATION.

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use; wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any talse statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)		
KURT F. STONEX	PLS 26,35	2	
TITLE	COMPANY NAME	•	
PLS.	OLSON ENGINEE	RING INC	
ADDRESS	CITY	STATE ZIP	
IIII BROADWAYA	VANCOUR	WA 9860	
SIGNATURE A S	4/1/97	PHONE (360) 695-1385	
Coples should be made of this Certificate	for: 1) community official, 2) insurance agen	t/company, and 3) building owner.	
COMMENTS: ELEVATIONS BE	DEO ON RMA		
the state of the s	AND THE STREET S	1,10	

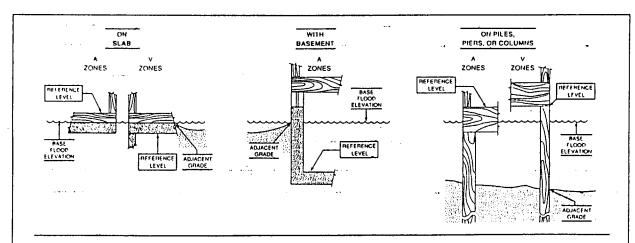

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.