# 94

O.M.B. NO. 3067-0077 Expires May 31, 1996

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to de. ...ine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or bidg, Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
LOT 94	
STATE WOODLAND WA.	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMAT	ПОИ
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER - 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZO	ONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth)
530035 0001 C SEPT 4, 1985. A15	(in AO Zones, use depth)
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVE 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a B the community's BFE:               feet NGVD (or other FIRM datum—see Section B, Item 7)	O '29 Other (describe on back) FE for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	<del> </del>
AM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the set of 135.8 feet NGVD (or other FIRM datum—see Section B, Item 7).  (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural mem the selected diagram, is at an elevation of 150 feet NGVD (or other FIRM datum—see Section B, Item 7).  (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building.  (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is 160 one) the highest grade adjacent to the building. If no flood depth number is available, is the build level) elevated in accordance with the community's floodplain management ordinance? Yes Indicate the elevation datum system used in determining the above reference level elevations: 160 under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is at the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the Fieduation under Comments on Page 2.)  4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)  5. The reference level elevation is based on: 200 actual construction 160 construction drawings	nber of the reference level from see Section B, Item 7). I feet above or set above or below (check ding's lowest floor (reference No Unknown NGVD '29 Other (describe different than that used on IRM and show the conversion
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference le case this certificate will only be valid for the building during the course of construction. A post-consi will be required once construction is complete.)	evel floor in place, in which truction Elevation Certificate
S. The elevation of the lowest grade immediately adjacent to the building is: \\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	VD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
1. If the community official responsible for verifying building elevations specifies that the reference level the "lowest floor" as defined in the community's floodplain management ordinance, the elevat floor" as defined by the ordinance is:	tion of the building's "lowest


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)		
KURT F. STONEX	PLS 26,352		
TITLE	COMPANY NAME	**************************************	
PLS.	OLSON ENGINEE	ZING INC	
ADDRESS	CITY	STATE ZIP	
1111 BROADWAYO	VANCOUVER	WA 98660	
SIGNATURE	4/1/97	PHONE (360) 695-1385	
Copies should be made of this Certificate fo	r: 1) community official, 2) insurance agen	/company, and 3) building owner.	
COMMENTS: ELEVATIONS BAS	EO ON RMA		
-			

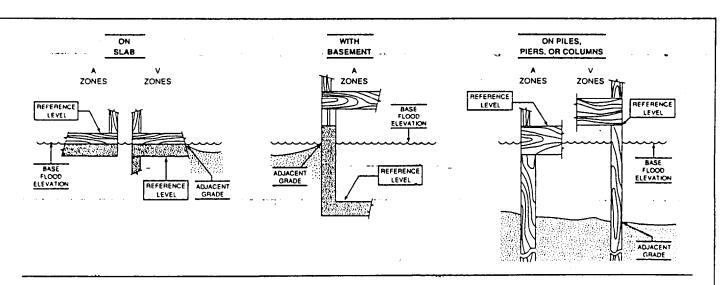

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.